

# BELL HOUSING (ALUMINIUM)


**FLUDEN**

## Product Characteristics

- By using bell housings motor and pump shaft are aligned to each other optimally
- Material aluminium low weight with sufficient strength
- Horizontal assembly possible with foot cum flange motor
- Bell housing material high graded aluminium pressure die cast
- Fluden GJM series aluminium bell housing are precisely machined to reduce misalignment of coupled shafts
- Aluminium bell housing also reduces the noise generation considerably
- Aluminium bell housing size available as per factory stock



## Section

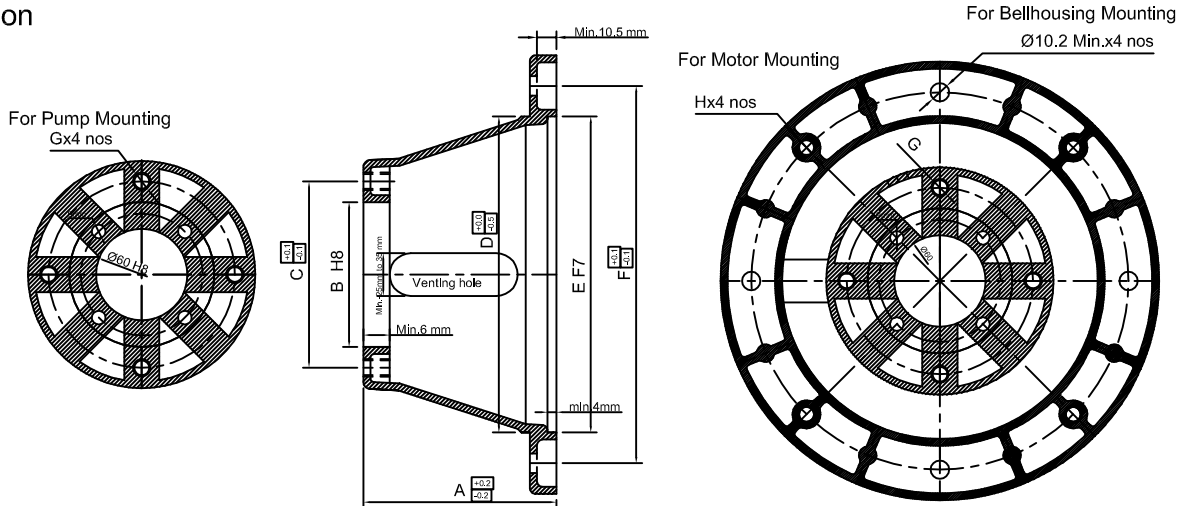

## Dimensional Details & Ordering information

	PART NO.	FRAME SIZE	MOTOR H.P.	A	B H8	C	D	E F7	F	G	H
	11082675	71	0.5	75	82.6	106.2	114	110	130	M10	M8
	13082680	80	0.75,1	80	82.6	106.2	140	130	165	M10	M10
	130826100	80,90 S/L	0.75,1,1.5,2	100	82.6	106.2	140	130	165	M10	M10
NEW	130826106	80,90 S/L	0.75,1,1.5,2	106	82.6	106.2	130	130	165	M10	M10
NEW	13080106	80,90 S/L	0.75,1,1.5,2	106	80	101.5	130	130	165	M8	M10
	130826130	80,90 S/L	0.75,1,1.5,2	130	82.6	106.2	140	130	165	M10	M10
	13060130	80,90 S/L	0.75,1,1.5,2	130	60	80	140	130	165	Ø9	M10
	180826110	100L/112M	3,5	110	82.6	106.2	180	180	215	M10	M12
	180826124	100L/112M	3,5	124	82.6	106.2	180	180	215	M10	M12
	18060124	100L/112M	3,5	124	60	80	180	180	215	Ø9	M12
NEW	1801016110 / 124	100L/112M	3,5	110/124	101.6	145.9	180	180	215	M12	M12
	230826145	132S/132M	7.5,10	145	82.6	106.2	230	230	265	M10	M12
	2301016145	132S/132M	7.5,10	145	101.6	145.9	230	230	265	M12	M12
	230100145	132S/132M	7.5,10	145	100	140	230	230	265	M12	M12
	23060145	132S/132M	7.5,10	145	60	80	230	230	265	Ø9	M12
	250127188 / 204	160 M/L,180 M/L	12.5,15,20,25,30	189 / 205	127	180.8	255	250	300	M16	M16
	250125188 / 204	160 M/L,180 M/L	12.5,15,20,25,30	189 / 205	125	180.8	255	250	300	M16	M16
	2501016188 / 204	160 M/L,180 M/L	12.5,15,20,25,30	189 / 205	101.6	145.9	255	250	300	M12	M16
	250100188 / 204	160 M/L,180 M/L	12.5,15,20,25,30	189 / 205	100	140	255	250	300	M12	M16
	250826188 / 204	160 M/L,180 M/L	12.5,15,20,25,30	189 / 205	82.6	106.2	255	250	300	M10	M16
	25060188 / 204	160 M/L,180 M/L	12.5,15,20,25,30	189 / 205	60	80	255	250	300	Ø9	M16
	101682687 / 92	EXTENSION BKT.	EB-1RE-1P / 1T	87 / 92	82.6	106.2	**	101.55	156	M10	Ø11
NEW	1016101690 / 100	EXTENSION BKT.	EB-1RE-2P / PVR-50	90 / 100	101.6	106.2	**	101.55	156	M12	Ø11

Note: \*This bell housing dimension as per Fluden gear coupling & Fluden standard

\* Bell housing kits with Bore key ways coupling & all mounting bolt also available

\* Tolerance: (+)(-) 1 MM

DIMENSIONS IN MM FOR REFERENCE ONLY